

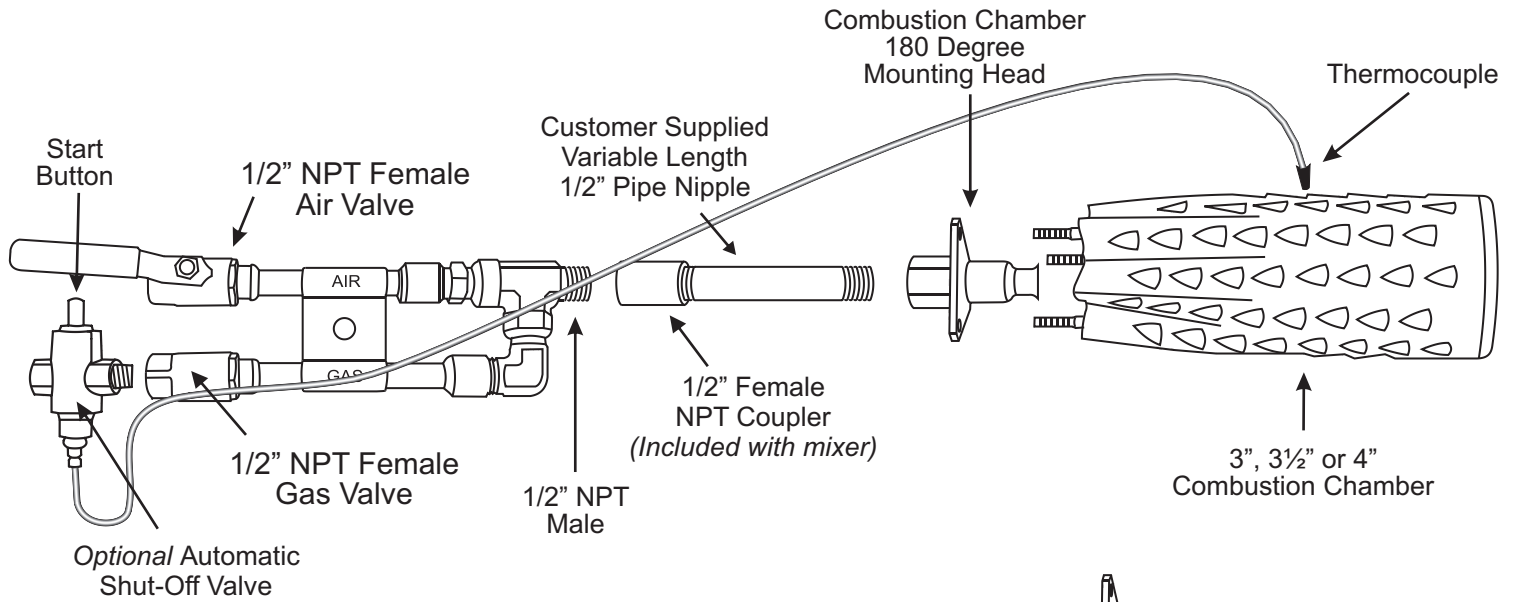


BELCHFIRE Model 4F Mixer

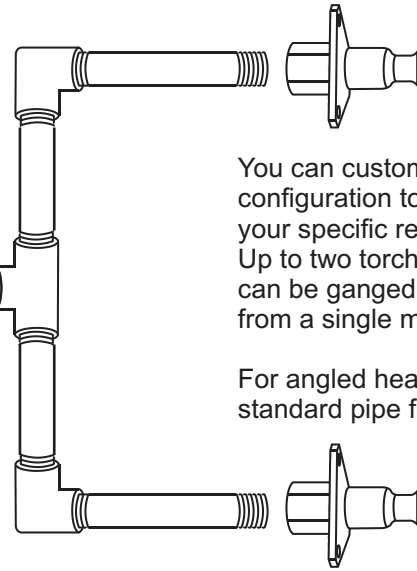

Custom Configurations

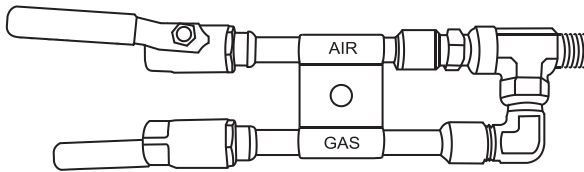

You can custom design a configuration to best suit your specific requirements. Up to two torch heads can be ganged to operate from a single mixer.

For angled heads use standard pipe fittings

4F PARTS ORDERING INFORMATION

PART #	DESCRIPTION
BF4F	Mixer - 4F
BF3F180	Head - 180 Degree - For 3" & 3½" Chambers
BF4F180	Head - 180 Degree - For 4" Chamber
BF3CC	3" Combustion Chamber
BF35CC	3½" Combustion Chamber
BF4CC	4" Combustion Chamber
BFAUTVAL	Optional Auto Shutoff
BF THERM (+ LENGTH)	Thermocouple 24", 36", 48", 60", 72"

SPECS FOR TORCH MODEL 4F

Fuel Consumption - BTU.....	2,000,000
Fuel Consumption - CFH	800
Air Consumption - CFM.....	13
Torch Length - IN.....	10.5
Torch Weight - LBS	3
Fuel & Air Connection - NPT	1 / 2
Air Pressure - PSIG	50 - 150
Fuel Pressure - PSIG	5 - 25

NOTE: Add "TC" to combustion chamber part number when using the optional auto shutoff valve.

BELCHFIRE

CORPORATION

4916 North 125th Street • Butler, WI 53007
Phone: (262) 783-1500 • Fax: 1-800-387-4491
Visit us at: BELCHFIRE.COM